



SingleLine, Surface & Suspended

SP190P 37S/840 PSU W6L120 NOC SW2 BK

SP190P | SingleLine, 34 W, 3700 lm, 4000 K, Power supply unit (On/Off) , Suspended, Black

SingleLine, Suspended

Product data

General Information	
Light source replaceable	No
Number of gear units	1 unit
Driver included	Yes
Service tag	Yes
Lighting Technology	LED
Value ladder	-
Serviceability class	-
Warranty period	5 years
Sustainability rating	-

Light Technical	
Luminous Flux	3,700 lm
Saturated Red (R9)	-
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	109 lm/W
Color rendering index (CRI)	>80
Beam angle of light source	-
Light source color	840
Optic type	-
Luminaire light beam spread	-
Unified glare rating CEN	23

Operating and Electrical	
Input Voltage	220 to 240 V
Line Frequency	50 to 60 Hz
Inrush current	24.5 A
Inrush time	136 ms
Power Consumption	34 W
Power Factor (Fraction)	0.95
Connection	Push-in connector 3-pole
Cable	-
Number of products on MCB of 16 A type B	36
Suitable for random switching	No
Protection class IEC	Safety class I

Controls and Dimming	
Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Control interface	-
Constant light output	No
Maximum dim level	Not applicable

Mechanical and Housing	
Housing Material	Steel
Reflector material	Steel
Optic material	Polycarbonate
Optical cover material	Polycarbonate
Fixation material	Stainless steel

Housing Color	Black
Optical cover finish	-
Overall length	1,135 mm
Overall width	61.8 mm
Overall height	71.8 mm
Dimensions (Height x Width x Depth)	71.8 x 61.8 x 1135 mm
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK03
Net Weight (Piece)	2.4 kg

Approval and Application	
Glow-wire test	Temperature 650 °C, duration 30 s
Flammability mark	For mounting on normally fammable surfaces
CE mark	Yes
ENEC mark	ENEC mark
Photobiological risk	Photobiological risk group 0 @200mm to EN62778
EU RoHS compliant	Yes
Performance ambient temperature Tq	25 °C
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	+10 to +35 °C


Initial Performance (IEC Compliant)	
Luminous flux tolerance	+/-10%
Initial chromaticity	(0.39, 0.38) SDCM <3
Power consumption tolerance	+/-10%
Standard Deviation of Colour Matching (McAdam ellipse)	SDCM≤3

Over Time Performance (IEC Compliant)	
Control gear failure rate at median useful life 50000 h	10 %
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 50000 h	L90
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 100000 h	L80

Product Data	
Order product name	SP190P 37S/840 PSU W6L120 NOC SW2 BK
Full product name	SP190P 37S/840 PSU W6L120 NOC SW2 BK
Full product code	-
Order code	-
Material Nr. (12NC)	910505106097
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8721103354211
Numerator - Packs per outer box	1
EAN/UPC - Case	-
Product family code	SP190P [SingleLine]

SingleLine, Suspended

Dimensional drawing

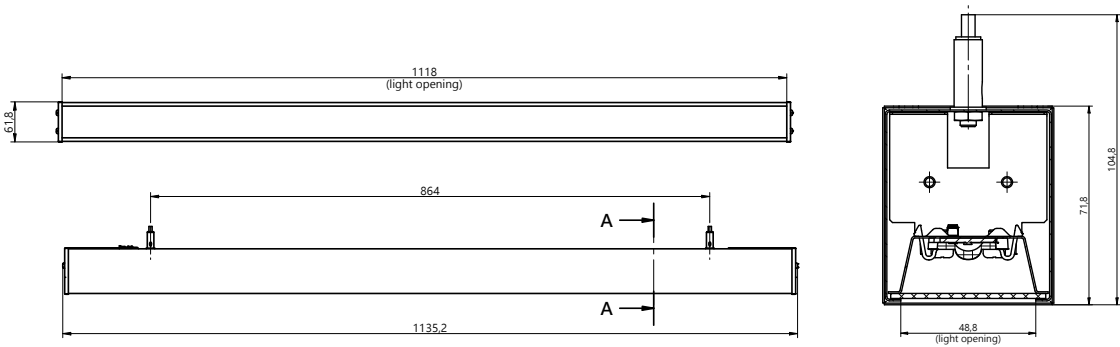

SP190P - 910505106097

